



# V40KJ

## Truck-Mounted Platform



### Standard Features

- vSAFE-GEOMAX Electronic Stability and Limitation System
- Full Proportional Control
- 2.40 x 0.96 x 1.10 m Extendable Aluminum Basket
- Basket Load Measuring System
- Multi-Language Color Display for Information and Diagnosis
- Electrohydraulic Stabilizers and Auto Leveling System
- Control Station in Basket
- Remote Assistance System
- 540° Turret Rotation (Non-continuous)
- $\pm 90^\circ$  Basket Rotation
- 150° High Flex Jib Boom
- Working Lights on Chassis and Basket
- Rubber Stabilizer Pads

### Optional Features

- Ergonomic and Tilttable Operator Cabin with Dashboard and Joysticks
- Cabin-Basket Intercom
- Basket Wind Sensor - Anemometer
- Basket Anti-Collision System
- DC Emergency Pump - Powerpack
- 380VAC Power Outlet in Basket
- Air/Water Outlet in Basket
- Cloud System (IoT)
- Custom Paintwork
- Operator Cabin Heating



[vesaplatform.com](https://vesaplatform.com)

\* Scan the QR Code to View Detailed Product Specifications.



## Technical Features



Working Height  
**40 m**



Lateral Outreach  
**27 m**




Load Capacity  
**500 kg**


|                                  |                             |
|----------------------------------|-----------------------------|
| Maximum Working Height           | 40.0 m                      |
| Maximum Lateral Outreach         | 27.0 m                      |
| Basket Capacity                  | 500 kg                      |
| Turret Rotation (Non-continuous) | 540°                        |
| Basket Dimensions                | 2.40 (3.60) x 0.96 x 1.10 m |
| Basket Rotation                  | ± 90°                       |
| Total Weight*                    | 18 T                        |
| Transport Length (A)*            | 10.15 m                     |
| Transport Height (B)*            | 3.99 m                      |
| Transport Width*                 | 2.55 m                      |

\* It depends on the truck model.

## Working Diagram

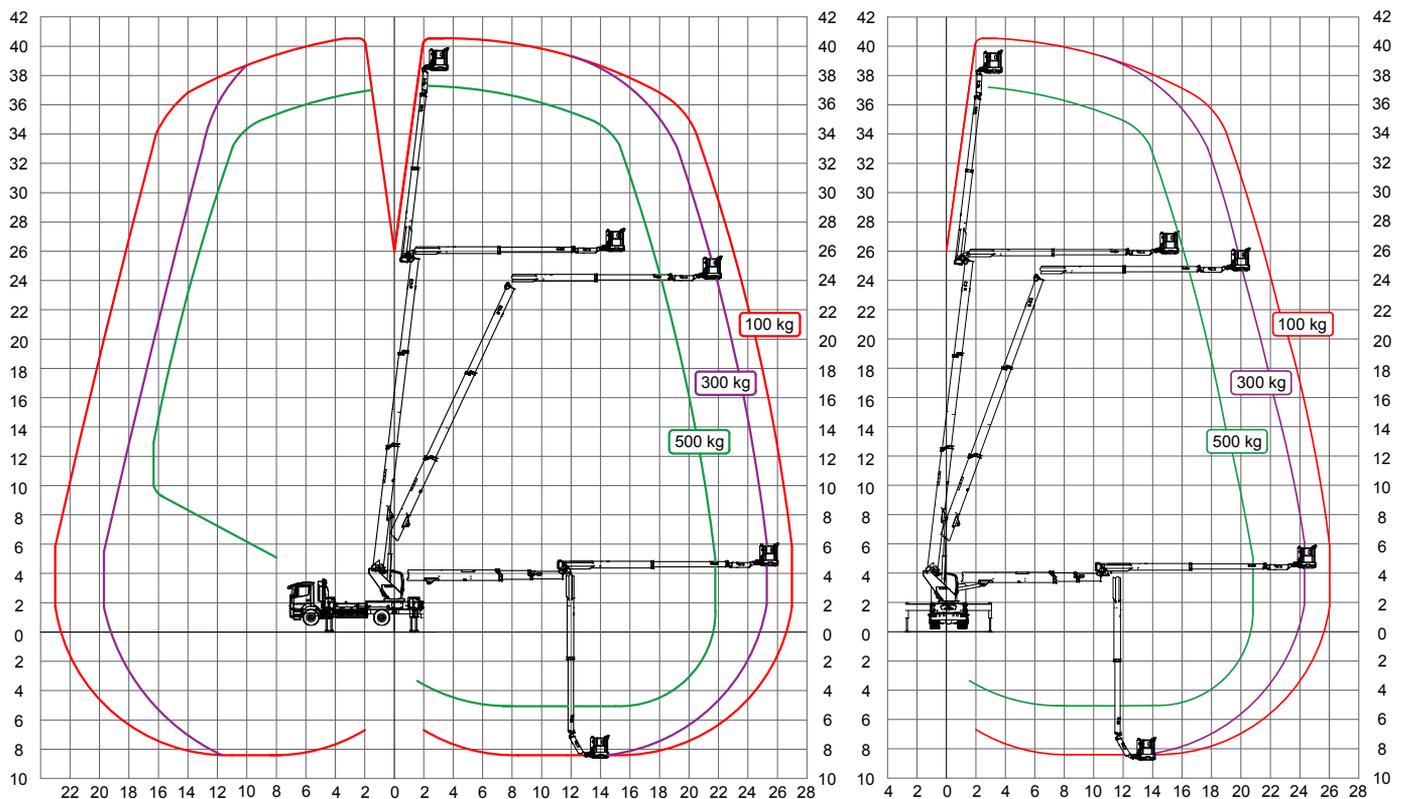

## Technical Drawings

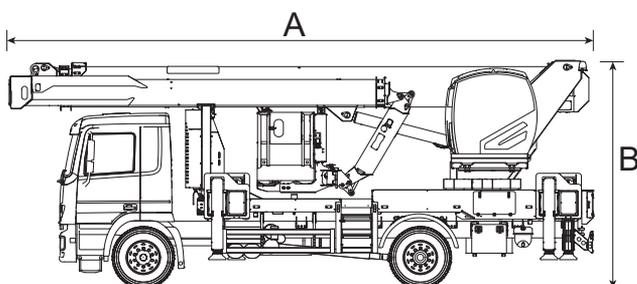

### IMPORTANT

\*Due to continuous product development, VESA PLATFORM reserves the right to make changes to specifications and/or equipment without prior notice.

\*Technical data are subject to a ±3% tolerance.